



# 주철 10K 플랜지형 글로브 밸브



## CAST IRON 10K FLANGED GLOBE VALVE



KOREA  
KS B 2350  
KCW-2014-0187


### Main parts ad materials

Parts name	Material
Body, Bonnet	Grey iron
Disc	Grey iron+Copper
Stem	Stainless steel
Hand wheel	Gtey iron

### Specification

Applicable Fluid	Water, Steam	
Working Pressure	Less than 10kgf/cm <sup>2</sup> (Max.1.0MPa)	
Applicable Temperature	Less than 120℃	
Connection Method	10K FF Flange	
Hydraulic Test	Body	21kgf/cm <sup>2</sup> (2.1MPa)
	Seat	16kgf/cm <sup>2</sup> (1.6MPa)

### Outline and connecting measurement

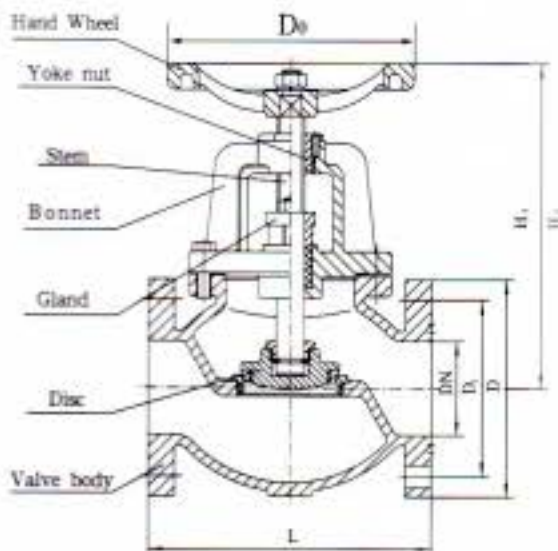

Size	L	D	b	Z x phi d	H	Do
40	190	140	20	2 x phi 19	196	105
50	200	155	20	4 x phi 19	263	180
65	220	175	22	4 x phi 19	300	190
80	240	185	22	8 x phi 19	309	210
100	290	210	24	8 x phi 19	363	240
125	360	250	24	8 x phi 23	437	260
150	410	280	26	8 x phi 23	490	270
200	500	330	30	12 x phi 25	602	350
250	600	400	30	16 x phi 25	618	450
300	620	445	32	16 x phi 25	691	450

\*The above specifications to be varied to suit your specific requirements.