

주철 10K 플랜지형 리프트 체크 밸브

CAST IRON 10K FLANGED LIFT CHECK VALVE



Main parts and materials


Parts name	Material
Body	Grey iron
Seat	Copper
Disc	Grey iron

Specification

Applicable Fluid	Water	
Working Pressure	Less than 10kgf/cm ² (Max.1.0MPa)	
Applicable Temperature	Less than 60°C	
Connection Method	10K FF Flange	
Hydraulic Test	Body	21kgf/cm ² (2.1MPa)
	Seat	16kgf/cm ² (1.6MPa)

Outline and connecting measurement

Size	L	D	b	Z-φd	H	D ₀
40	162	140	18	4×φ19	113	68
50	183	155	18	4×φ19	117	68
65	195	175	18	4×φ19	124	68
80	210	185	20	8×φ19	133	68
100	215	210	22	8×φ19	143	68
125	255	250	22	8×φ23	166	68
150	275	280	23	8×φ23	177	68
200	390	330	24	12×φ23	238	85
250	410	400	28	12×φ25	265	85
300	495	445	28	16×φ25	304	85

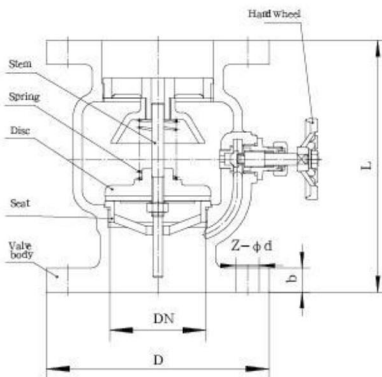

*The above specifications to be varied to suit your specific requirements.