



SERIES F 7367 - JIS 5K / SERIES F 7368 - JIS 10K Bronze Gate Valve (Rising Stem)

Manufactured in accordance to JIS F 7400 / Flanges as per JIS B 2240 - 5K, 10K

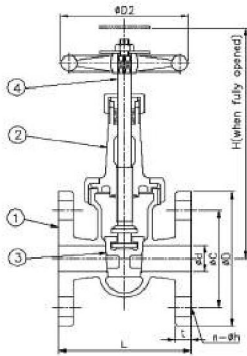

SERIES F 7367 5K Gate Valve

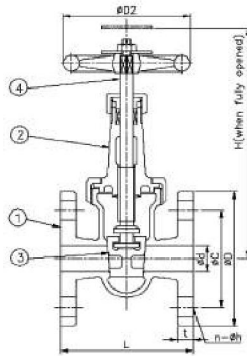

SERIES F 7368 10K Gate Valve


Part No.	Material
1 - Body	Bronze
2 - Bonnet	Bronze
3 - Disc	Bronze
4 - Stem	Brass

Test Pressure MPa[Kgf/cm ²]		
SIZE	Body	Seat
5K	1,5 [10,5]	0,77 [7,7]
10K	2,1 [21,0]	1,54 [15,4]

Size	d	L	D	C	n-h	t	H	D2	Kg	
F 7367 -5K	015	15	90	80	60	4-12	9	175	80	2,29
	020	20	100	85	65	4-12	10	200	80	2,98
	025	25	110	95	75	4-12	10	220	100	4,10
	032	32	130	115	90	4-15	12	250	100	5,79
	040	40	140	120	95	4-15	12	290	125	7,78
F 7368 -10K	015	15	100	95	70	4-15	12	175	80	2,96
	020	20	110	100	75	4-15	14	200	80	3,89
	025	25	120	125	90	4-19	14	220	100	5,82
	032	32	140	135	100	4-19	16	250	100	7,52
	040	40	150	140	105	4-19	16	290	125	9,71

SERIES F 7369 JIS 16K Cast Iron & Cast Steel Gate Valve

Manufactured in accordance to JIS F 7400 / Flanges as per JIS B 2210 - 16K

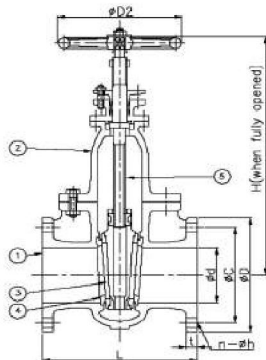

SERIES F 7369 Gate Valve

Part No.	Material	
	Class S	Class B
1 - Body	Cast Iron / Cast Steel	
2 - Bonnet	Cast Iron / Cast Steel	
3 - Disc	Stainless Steel / Bronze	
4 - Seat	Stainless Steel / Bronze	
5 - Stem	Stainless Steel / Brass	

Test Pressure MPa[Kgf/cm ²]	
Body	2,4 [24,0]
Seat	1,76 [17,6]

SIZE	d	L	D	C	n-h	t		H	D2	Kg
						FC	SC			
050	50	210	155	120	8-19	20	16	300	140	17,1
065	65	240	175	140	8-19	22	18	350	160	26,5
080	80	260	200	160	8-23	24	20	400	180	31,5
100	100	290	225	185	8-23	26	22	450	200	44,9
125	125	310	270	225	8-25	26	22	520	224	63,2
150	150	330	305	260	12-25	28	24	580	250	82,3
200	200	370	350	305	12-25	30	26	700	315	130
250	250	430	430	380	12-27	34	28	840	400	203
300	300	490	480	430	16-27	36	30	1010	560	430
350	335	540	540	480	16-33	38	34	1070	560	580
400	380	610	605	540	16-33	42	38	1185	630	780